GAS DRIVEN CENTRIFUGALS

10 - 1 - 08

DEAN BENNETT SUPPLY CO
Toll Free : 800-621-4291
PRICES ARE YOUR NET COSTS

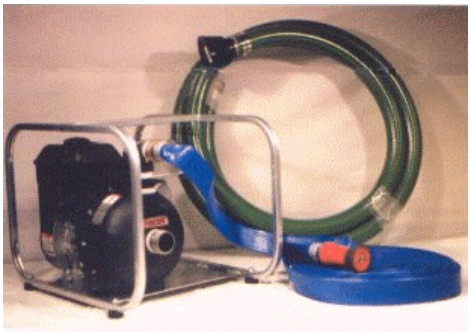

2” FIRE PROTECTION PACKAGE

FIREPKG **$ 889.00**

When fire threatens your home, the Pacer fire protection pump system makes it possible to protect your home or buildings until the fire department arrives. Pacer’s fire protection package contains a 2” gas driven pump with a 5.5 hp Briggs & Stratton engine, 20’ of 2” suction hose with a strainer, 100’ of 1-1/2” discharge hose and a spray nozzle. The pump is protected by a roll cage. This unit can spray a horizontal stream with the nozzle up to 80’, a vertical range of up to 40’ and a 30 degree spray up to 40’, pumping a maximum of 60 gpm. This uses the 5 1/2 hp pump SEB2UL-E51C.

2” FIRE PACKAGE w/ CART

FIREPKGWCART **$ 939.00**

Like the unit above, except it is mounted on a cart to make it more portable. This allows you to use the pump for fighting grass, brush, wooded area or building fires, moving to where you need it. Comes with the pump, cart, adjustable spray nozzle, 100’ of 1-1/2” discharge hose, suction hose and accessories

5 1/2 HP 2” x 2” GAS DRIVEN PUMP

$ 450.00 **SEB2UL-E5IC GAS DRIVEN PUMP**

2X2GAS5HPNC

Pacer’s SEB2UL-E51C 5-1/2 hp Briggs & Stratton Intek OHV gasoline engine powered 2” gas driven EconoAg pump will pump water at 120’ of total dynamic head. Housing, volute and impeller are glass reinforced polyester. Rubber parts are EPDM, and shaft seal is stainless steel with carbon and ceramic faces, EPDM fitted. Working pressure up to 50 psi and total flow up to 200 gallons per minute.

CAPACITY CHART FOR SEB2UL-E5IC

10’	20’	30’	40’	50’	60’	70’	80’	90’	100’	110’	120’
tdh	tdh	tdh	tdh	tdh	tdh	tdh	tdh	tdh	tdh	tdh	tdh
200	190	180	170	160	150	140	125	110	85	60	20
gpm	gpm	gpm	gpm	gpm	gpm	gpm	gpm	gpm	gpm	gpm	gpm

8 HP 3” x 3” GAS DRIVEN PUMP

$ 899.00 **SE3XL-E8ICP 3” PUMP w/ROLL CAGE**

3X3GAS

Pacer’s 8 HP Gas Driven Centrifugal Pump with 3” suction and 3” discharge will provide you the extra power needed for more gallons at higher head. Constructed of corrosion resistant polyester with stainless steel fasterners. Factory installed roll cage for easy handling and superior protection. Powered by an 8 HP Briggs & Stratton Intek Pro gasoline engine with overhead valve design.

CAPACITY CHART FOR SE3XL-E8ICP

10’	20’	30’	40’	50’	60’	70’	80’	90’	100’	110’	120’
tdh	tdh	tdh	tdh	tdh	tdh	tdh	tdh	tdh	tdh	tdh	tdh
230	230	220	210	205	195	180	160	145	120	100	60
gpm	gpm	gpm	gpm	gpm	gpm	gpm	gpm	gpm	gpm	gpm	gpm